

# Simulation of Stator Oriented Vector Controlled Doubly-Fed Induction Generator for Harnessing Wind Energy Effectively

Chirag Vadaliya<sup>1</sup>, Amit N Patel<sup>2</sup>, Vinod Patel<sup>3</sup>

**Abstract**— Wind energy plays an increasingly important role in the world because it is friendly to the environment and limitless. During the last decades, the concept of a variable-speed wind turbine (WT) has been receiving increasing attention due to the fact that it is more controllable, efficient, and has good power quality. In order to most effectively utilize the wind energy and improve the efficiency of wind generation system an optimum control strategy of doubly-fed induction generators (DFIG) is proposed. This paper presents a stator flux oriented vector control strategy for a 2MW/690V doubly fed induction generator (DFIG)-based wind energy generation system to control the rotor side converter to control the active and reactive power and grid side converter control to maintain dc link voltage constant.

**Keywords**— *Doubly fed induction generator (DFIG), Vector control, active and reactive power control, Wind power.*

## I. Introduction

Due to the increasing concern about CO<sub>2</sub> emissions, renewable energy systems and especially wind energy generation have attracted great interests in recent years. Large wind farms have been installed or planned across the world and the power ratings of the wind turbines and wind farm are increasing. Many studies [1-3] are oriented toward this type of energy production in the aim to make it more efficient. Wind turbine must be adjusted accordingly to wind speed, hence the variable speed generator based wind turbines are mostly used in wind power industry to capture more energy from wind [4].

There are many type of variable speed wind generator like permanent magnet synchronous generator (PMSG), squirrel cage induction generator (SCIG) and doubly fed induction generator (DFIG). Out of these control and performance of DFIG based wind energy conversion system is analyzed in this paper.

The DFIG based wind turbine offers several advantages over to other wind turbines including variable speed operation

Chirag Vadaliya<sup>1</sup>, Amit N Patel<sup>2</sup>  
Institute of Technology, Nirma University  
India

Vinod Patel<sup>3</sup>  
AMTECH Electronics Pvt. Ltd., Gandhinagar  
India

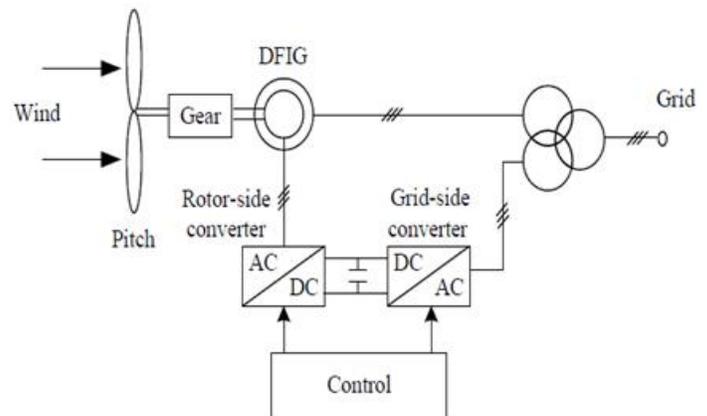


Fig.1 DFIG based wind energy conversion system

( $\pm 30\%$  around the synchronous speed) and four quadrants active and reactive power capabilities. Such a system also results in lower converter costs (typically 30% of total system power) and lower power losses compared to a system based on a fully fed synchronous generator with full rated converter. It is also capable of generating active power at constant frequency and the generated active and reactive power is controlled independently for better grid integration.

Figure 1 shows the DFIG system. The stator of the DFIG is directly connected to the grid and rotor is connected to grid through four quadrant power converters comprises of two back to back PWM-VSC (rotor side converter and grid side converter). The rotor side converter (RSC) controlling active and reactive power and the grid side converter (GSC) maintain DC-link constant and controlling reactive power to control power factor. The converters are controlled using vector control technique. The stator voltage oriented vector control strategy is used to de-coupled control of active and reactive power. This paper explains the model of DFIG in the “d-q reference frame” and stator flux oriented vector control strategy of DFIG.

## II. Modelling of DFIG

The induction machine d-q or dynamic equivalent circuit is shown in Figure 2. Based on the equivalent circuit, the main

equations of doubly fed induction generator stator and rotor voltage can be written as follows in matrix form:

$$V_{sabc} = r_s i_{abc} + p\lambda_{abc} \quad (1)$$

$$V_{rabc} = r_r i_{abc} + p\lambda_{abc} \quad (2)$$

Applying synchronously rotating reference frame transformation [9] to equation (1) and (2), the voltage equations become

$$V_{ds} = r_s i_{ds} - \omega_s \lambda_{qs} + p\lambda_{ds} \quad (3)$$

$$V_{qs} = r_s i_{qs} + \omega_s \lambda_{ds} + p\lambda_{qs} \quad (4)$$

$$V_{dr} = r_r i_{dr} - (\omega_s - \omega_r) \lambda_{qr} + p\lambda_{dr} \quad (5)$$

$$V_{qr} = r_r i_{qr} + (\omega_s - \omega_r) \lambda_{dr} + p\lambda_{qr} \quad (6)$$

Where  $\omega_s$  is the rotational speed of the synchronous reference frame,  $\omega_r$  is the rotor speed, and the flux linkages are given by

$$\lambda_{ds} = L_{ls} i_{ds} + L_m (i_{ds} + i_{dr}) = L_s i_{ds} + L_m i_{dr} \quad (7)$$

$$\lambda_{qs} = L_{ls} i_{qs} + L_m (i_{qs} + i_{qr}) = L_s i_{qs} + L_m i_{qr} \quad (8)$$

$$\lambda_{dr} = L_{lr} i_{dr} + L_m (i_{dr} + i_{ds}) = L_r i_{dr} + L_m i_{ds} \quad (9)$$

$$\lambda_{qr} = L_{lr} i_{qr} + L_m (i_{qr} + i_{qs}) = L_r i_{qr} + L_m i_{qs} \quad (10)$$

Where  $L_s = L_{ls} + L_m$  and  $L_r = L_{lr} + L_m$ ;  $L_{ls}$ ,  $L_{lr}$  and  $L_m$  are stator and rotor leakage inductance and mutual inductances, respectively.

Neglecting the power losses associated with the stator resistance, the active and reactive stator powers are:

$$P_s = \frac{3}{2} (v_{qs} i_{qs} + v_{ds} i_{ds}) \quad (11)$$

$$Q_s = \frac{3}{2} (v_{qs} i_{ds} - v_{ds} i_{qs}) \quad (12)$$

### III. Design of Control system

The objective of the RSC is to govern both the stator-side active and reactive powers independently, while the objective of the GSC is to keep the dc-link voltage constant regardless of the magnitude and direction of the rotor power. The GSC control scheme can also be designed to regulate the reactive power.

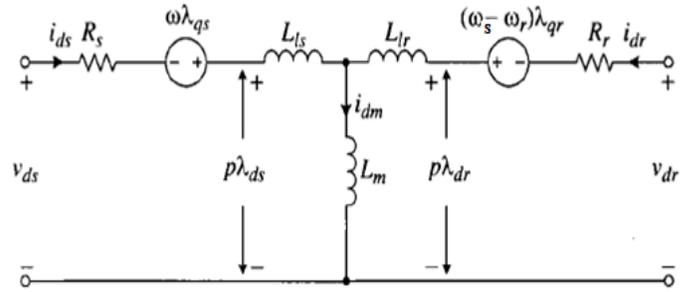
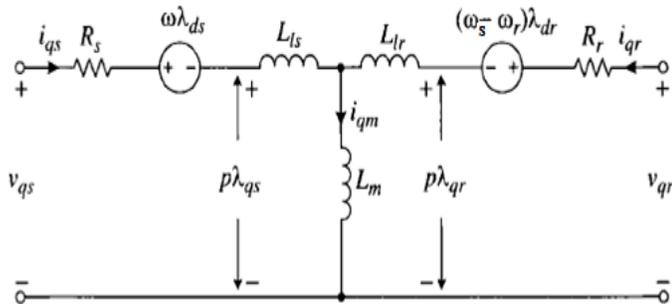


Fig.2 Equivalent circuit of DFIG in q-d axis

#### A. Design of RSC controller

The RSC control scheme consists of two cascaded control loops. The inner current control loops regulate independently the  $d$ -axis and  $q$ -axis rotor current components  $i_{dr}$  and  $i_{qr}$ , according to synchronously rotating reference frame. The stator-flux oriented reference frame [10] is the most commonly used one. The outer control loops regulate both the stator active power (or the generator rotor speed) and reactive power independently.

Aligning the  $q$ -axis of the reference frame along the stator-voltage position  $v_{qs} = v_s$  and  $v_{ds}$  is zero, since the amplitude of the supply voltage  $v_{qs}$  is constant. The active and reactive power will be proportional to  $i_{qs}$  and  $i_{ds}$  respectively.

Hence, the active and reactive power from equation (11) and (12) are

$$P_s = \frac{3}{2} v_{qs} i_{qs} \quad (13)$$

$$Q_s = \frac{3}{2} v_{qs} i_{ds} \quad (14)$$

The active and reactive power will be proportional to  $i_{qs}$  and  $i_{ds}$  respectively.

Since the stator is connected to the grid, and the influence of the stator resistance is small, the stator magnetizing current  $i_{ms}$  can be considered constant. In the stator-flux oriented reference frame, the  $d$ -axis is aligned with the stator flux linkage vector  $\lambda_s$ , namely,  $\lambda_{ds} = \lambda_s$  and  $\lambda_{qs} = 0$ . This gives the following relationships

$$i_{qs} = -\frac{L_m}{L_s} i_{qr} \quad (15)$$

$$i_{ds} = -\frac{L_m}{L_s} (i_{ms} - i_{dr}) \quad (16)$$

Where,

$$i_{ms} = \frac{v_{qs} - r_s i_{qs}}{\omega_s L_m} \quad (17)$$

$$v_{dr} = r_r i_{dr} + \sigma L_r p i_{dr} - s \omega_s \sigma L_r i_{qr} \quad (18)$$

$$v_{qr} = r_r i_{qr} + \sigma L_r p i_{qr} + s \omega_s (\sigma L_r i_{dr} + L_m^2 \frac{i_{ms}}{L_s}) \quad (19)$$

$$\sigma = 1 - \frac{L_m^2}{L_s L_r} \quad (20)$$

So, The active and reactive power are

$$P_s = -\frac{3}{2} \omega_s L_m^2 i_{ms} i_{qr} / L_s \quad (21)$$

$$Q_s = \frac{3}{2} \omega_s L_m^2 i_{ms} (i_{ms} - i_{qr}) / L_s \quad (22)$$

Equations (21) and (22) indicate that active power is proportional to the  $i_{qr}$  and can be regulated using  $v_{qr}$  (equation 19), and reactive power is proportional to the  $i_{dr}$  and can be controlled using  $v_{dr}$  (equation 20). Consequently, the



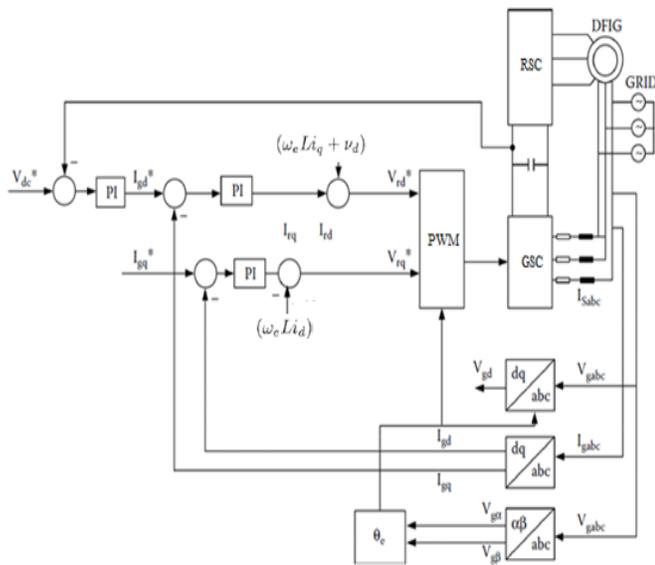


Fig 5. Schematic block diagram of GSC control.

The above vector control principles are illustrated in the generic scheme shown in Figure 5. The DC link voltage is, in general, kept constant to take advantage of full voltage for capacitor energy storage in the DC link.

Where,

$$v_{d1}^* = -v_d' + (\omega_s L i_q + v_d) \quad (30)$$

$$v_{q1}^* = -v_q' - (\omega_s L i_d) \quad (31)$$

$v_{d1}^*$  and  $v_{q1}^*$  are the reference values for the supply-side converter, and the terms in brackets constitute voltage-compensation terms.

#### iv. Simulation Results

The 2MW/690V DFIG model is analyzed using PSIM under steady-state condition, the machine parameters are given in appendix below. Figure 10a-10f shows the output of DFIG model in super-synchronous mode. The negative sign of active power means generated active power. It is cleared from fig. that the machine speed in super-synchronous mode is higher than the synchronous speed.

The vector control system based on the stator flux oriented reference frame is simulated in PSIM, and a reference 2MW stator active power was applied to the outer control loop, and the reactive power demand is set to zero.

The stator active power was able to track the applied reference value which confirms the validity of the control system. The Grid side converter maintain 1000 V DC-link voltage as shown in figure 6f and unity power factor as shown in figure 6e.

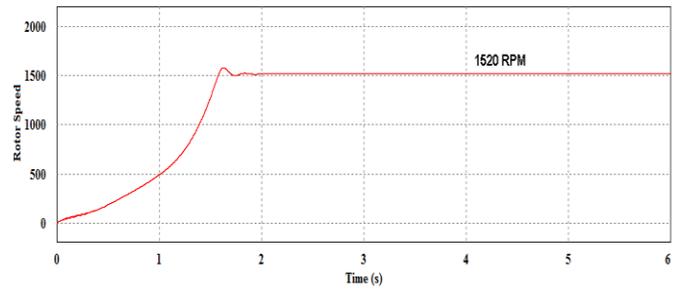


Fig.6a Machine speed (RPM)  
 [X-axis: 1 div = 1 sec, Y-axis: 1 div = 500 rpm]

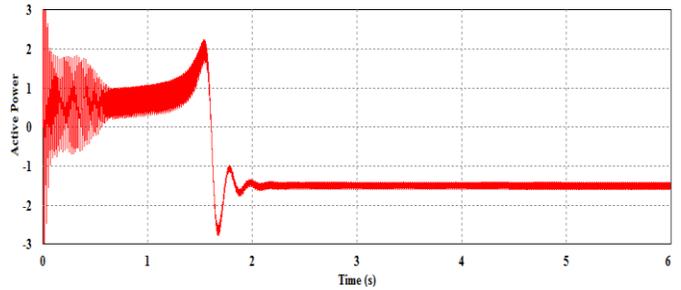


Fig.6b Stator Active power (pu)  
 [X-axis: 1 div = 1 sec, Y-axis: 1 div = 1 pu]

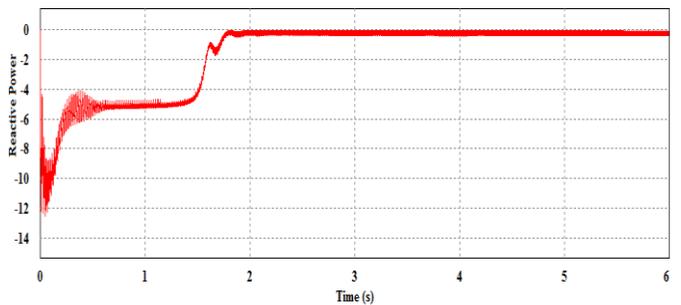


Fig.6c Stator Reactive power (pu)  
 [X-axis: 1 div = 1 sec, Y-axis: 1 div = 1 pu]

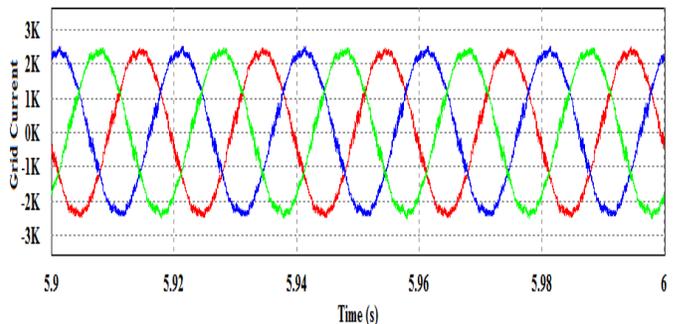


Fig.6d Grid Current (Amp)  
 [X-axis: 1 div = 20 msec, Y-axis: 1 div = 1k amp]

## References

- [1] Rajib Datta and V. T. Ranganathan, Senior Member, IEEE , “Variable-Speed Wind Power Generation Using Doubly Fed Wound Rotor Induction Machine—A Comparison With Alternative Schemes”, IEEE Transactions on energy conversions, Vol. 17(3),. pp. 414-421, September 2002.
- [2] R. Hoffmann, P. Mutschler, Member, IEEE, “Comparison of Wind Turbines Regarding their Energy Generation”, power electronics Specialists conference, Vol. 1, pp. 6-11, 2002.
- [3] Donald S. Zinger, Senior Member, IEEE, and Eduard Muljadi, Senior Member, IEEE, “Annualized Wind Energy Improvement Using Variable Speeds”, IEEE Transaction on industry Applications, Vol. 33(6), November/December 1997.
- [4] Che Yanbo, Wang Yu, Wang Chengshan, Ai Lin, “Research on Grid-Connected Power Control for Double-Fed Generator”, Power and Energy Engineering Conference, pp. 1-4, 2009.
- [5] S. Muller, M. Deicke, R.W.De Doncker, “ Doubly fed Induction Generator systems for wind turbines”, IEEE transection on Industrial Applications, Vol. 8(3), pp. 16-33, May/June-2002.
- [6] Bimal K. Bose, “Modern Power Electronics And AC Drives”, USA, Prentice Hall PTR , Inc.2002.
- [7] Paul C.Krause, “Analysis of Electric Machinery.” McGraw-Hill, Inc.1986.
- [8] J. Marques, H. Pinheiro, et al., “A Survey On Variable-Speed Wind Turbine System”, Federal University of Santa Maria.
- [9] Janaka B. Ekanayake, Lee Holdsworth, XueGuang Wu, and Nicholas Jenkins, “Dynamic Modelling of Doubly Fed Induction Generator for Wind Turbines”, IEEE transactions on power system, Vol. 18, No. 2, May 2003.
- [10] Y. Tang and L. Xu, “A Flexible active and reactive power control strategy for a variable speed constant frequency generating system”, IEEE Transection on Power Electronics, vol. 10, no. 4, pp. 472-478, July 1995.
- [11] Arantxa Tapia, Gerardo Tapia, J. Xabier Ostolaza, and Jose Ramon Saenz, “Modeling and Control of Wind Turbine Driven Doubly Fed Induction Generator”, IEEE Transactions on Energy Conversion, Vol. 18(2), June 2003.
- [12] Yougui Guo, Ping Zeng, and Blaabjerg F, “Modelling and Simulation of Generator Side Converter of Doubly Fed Induction Generator-Based Wind Power Generation System”, ICEEE International Conference, Wuhan, China, November 2010.
- [13] Lie Xu, Cartwright P, “Direct Active and Reactive Power Control of DFIG for Wind Energy Generation”, IEEE Transactions on Energy Conversion, Vol. 21(3), September 2006.

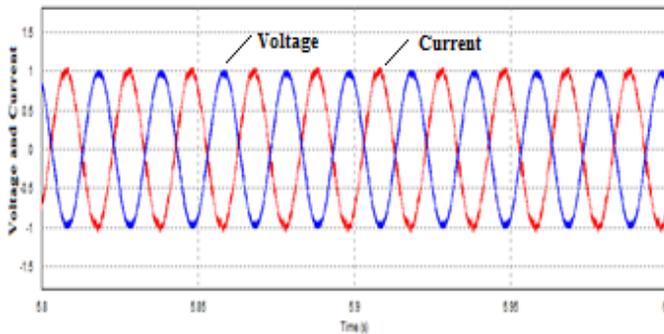


Fig.6e : Power Factor (Unity)

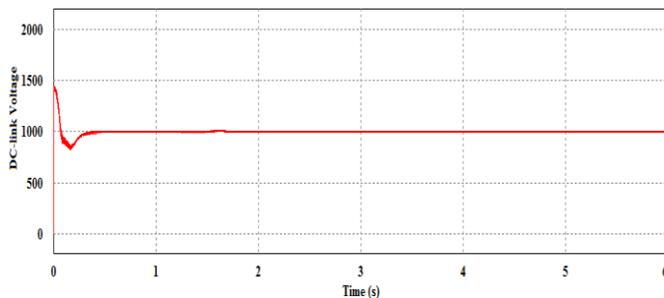


Fig.6f DC-link Voltage (Volt)  
 [X-axis: 1 div = 1 sec, Y-axis: 1 div = 500 volt]

## v. Conclusion

The 2 MW/690 V DFIG system has been simulated in PSIM. A bi-directional IGBT based four quadrant AC-DC-AC converter with IGBT modules used in DFIG wind power generation system is presented. The converter can operate at sub-synchronous and super-synchronous modes. Based on DFIG model and field oriented control theory, the machine side converter provides good decoupling between active and reactive powers, and the grid side converter maintain DC-link voltage and power factor to be unity, which leads to high power quality and higher efficiency in harnessing wind energy effectively.

TABLE I. MACHINE PARAMETERS

Rated Power	2 MW
Rated voltage	690 V
Frequency	50 Hz
Stator resistance	2.6 mΩ
Rotor resistance	2.9 mΩ
Stator leakage inductance	87 μH
Rotor leakage inductance	87 μH
Magnetizing inductance	2.5 mH
No. of poles	4



**Chirag Vadaliya** has received his B.E. degree in Electrical Engineering from Sarvajanik college of engineering and technology, Surat, India in 2012. He is currently pursuing M.Tech degree in power electronics machines and drives, at the Institute of Technology, Nirma University, Ahmedabad, India. He has done this work in AMTECH Electronics (I) Ltd., Gandhinagar, India.