

Model of Sender Node Energy Savings Achievable with Location-Aware MANET Transmission in Ubicomp.

M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY

Abstract – Tracking location in mobile environment has been a subject of research for quite long and significant progress has been reached [33-48]. The next stage remains devising new functionalities/applications and improving ways of doing existing activities making use of location-awareness. One area of such an improvement will be in the field of MANET communication over which ubicomp will rely. A big area missing in MAUC remains the software engineering approaches into metrics development, gathering and modelling which can be used for prediction and better gearing of future investments of resources [2]. The particular area of concern here is energy considerations in ubicomp. How much energy savings can be achieved by a sender node in location-aware MANET transmission? Is there any pattern of trend that the sender energy savings follow under different sets of node densities? How to gather information on probabilities of saving less or greater than a particular percentage of energy?

Need for formulating applicable models is felt since it involves lots of work and results will be used by designers to formulate better ubicomp component architectures. This paper is a follow-up of previous papers [1-13].

Key terms: Ubicomp-Ubiquitous Computing, MAUC-Mobile and Ubiquitous Computing, SES-Sender Energy Savings, MANET-Mobile Adhoc Network, CBR-Constant Bit Rate, BRE-Basic Reference Energy.

M. Kaleem GALAMALI,
University of Technology Mauritius (student)
Mauritius

Assoc. Prof Nawaz Mohamudally
University of Technology Mauritius,
Mauritius

1. Introduction

Many factors energy consumption in MAUC [2]. Another pertinent factor is type of transmission and if it is MANET transmission the subsequent pertinent factor is node densities. An attempt has been made to find a particular trend/model which depicts energy savings that can be reached by senders in MAUC to rate the effectiveness of location-aware MANET transmission strategies compared to the theoretical/empirical models derived in simulations.

The key contributions of this paper is firstly, the development of a new metric SES, including its

definition and rationale, and secondly, the model of trend put forward for the metric SES with results for varying node densities from 7 until 56. The model suggested in this paper is the exponential model. The rest of this paper is organised as follows: section 2- Experiment Design, section 3-New Metric- Sender Energy Savings, section 4- SES Trend Assessment over Varying Node Numbers, 5- Conclusion and References.

2. Experiment Design.

The software and platform used are as in previous paper [2]. Other characteristics like experiment topography, types of movement scenarios and communication used also follow as in previous paper [2]. Additional components which were developed to enable this study are as follows:

2.1 Exact Location Tracking of node positions.

Here, 60 movement scenarios have been analysed for 50 scenarios of varying node numbers. The exact positions for each node are recorded for time intervals of 0.001 seconds

Design and Optimisation Concerns: the program was designed in such that it could run for all sets of node densities identified. For optimising storage space, the tracking records were saved only if node positions values change compared to previous record saved. The percentage saving was estimated at 60%. Overall 113 GB were needed. Each of the 660 simulations identified took about 15-20 minutes over 1 laptop. 3 laptops working in parallel was made use of.

2.2 MANET Route Formulation and Nodes Energy Expenditure.

The processing needed to find the closest neighbour to the sender node, its square distance (sq_d) and corresponding energy consumed (e_c) and repeating the procedure for successive MANET nodes, for each packet transmitted. An example of a record is:

```
cbr(998) t: 9.411639639 pkt_size: 471 s-x: 250 s-y: 40 r-x: 150 r-  
y: 40 v_n: 8 sq_d: 57.995521280170983 e_c:  
27315.890522960533 15 sq_d: 236.68607123397172 e_c:  
111479.13955120069 14 sq_d: 647.96950328513549 e_c:  
305193.63604729879 24 sq_d: 1313.6847436724611 e_c:  
618745.51426972914 16 sq_d: 1219.776792579818 e_c:  
574514.86930509424 22 sq_d: 936.2954315674865 e_c:  
440995.14826828614 6 sq_d: 747.42427331514045 e_c:
```

352036.83273143118 7 sq_d: 0 e_c: 0 5 sq_d: 1369 e_c:
 644799 56 sq_d: 3385 e_c: 1594335 hops 10 endl

Again, same program was made to work for varying CBRs and node densities and loop execution was enabled to achieve more execution rapidity, simplicity and continued overnight uninterrupted. Overall file sizes required is 5 833.7 GB.

2.3 Processing of MANET Routes Packets Per CBR.

Broadly three areas were identified for study: Energy Consumption considerations, Link/Route information, Packets per distance information.

Again here, triple nested loop execution approach was sought to, with assistance of progress monitoring files. Here, overall 2 267.68 MB was required. Program optimisation and concurrent running of 6 streams was also applied.

2.4 MANET Results Generations.

This has concerned gathering summarised tabular results from data obtained in previous sections. Overall storage requirements here is 370.5 MB.

2.5 Automated Extractions of data from Files.

The successive operations required were automated extractions of data into datasheets followed by automated extraction of data from datasheets into tabular displays.

3. New Metric: Sender Energy Savings (SES).

When using MANETs, mostly the sender will just send each packet to the closest node instead of directly to the destination node. Further MANET routing is not the problem/concern of the sender. The nodes in the MANET may be regarded as an available infrastructure and that routing concern is freed from sender “legitimately”, i.e. in an accepted way as provided by a service provider.

Prior to defining SES, another term “the Basic Reference Energy (BRE) is put forward as the amount of energy spent by a sender in Direct Node-to-Node transmission if all CBR packets were transmitted at maximum distance noted between sender and receiver.

SES is hence defined as the result of computing the total energy spent by the sender only, for every packet

in a CBR, and the energy savings achieved together with corresponding % with respect to the BRE.

Definitely here, the % SES cannot be below 0, since otherwise it would be better to achieve Node-to-Node (NTN) transmission and not use MANET.

4. SES Trend Assessment over Varying Node Numbers.

4.0 Major Observations.

The trends for SES achieved for node numbers 7-56 tend to follow an exponential distribution of the form:

$$F(x) = a * \exp(b * (x-c))$$

The minimum value of SES has been 2 % Energy Savings achieved by less than 1 % of CBRs for node numbers 7 until 9; 3 % Energy Savings for node number 10 until 16; 4% for node numbers 17 until 56. A smooth gradual increase for this minimum SES is observed for increasing node numbers.

The maximum value of SES has been 100 % ES (i.e. 99.5 until less than 100, rounded to 100). However the % CBRs reaching this maximum has shown increasing tendency for increasing number of nodes.

Already, for smallest node number 7, the % Energy Savings where peak value of % CBR occurs is as high as 94 and shows an increasing tendency for increasing node numbers. The peak value also shows an increasing tendency.

Only for node number 7, there is a linear tendency noted after the peak value. It has applied for no other node numbers. Equation of the linear tendency is

$$G(x) = (-1.76134 * x) + 176.333$$

4.1 Tabular Summary of Results.

A tabular summary for results of equations of curves (F(x)) observed here is shown below. Column headings are: A→node number, B→Value of parameter a, C→Value of parameter b, D→Value of parameter c, E→reduced Chi-square value of plot, F→Corresponding figure number

A	B	C	D	E	F
7	0.253 423	0.175 689	72.995 6	0.082 096 6	1
8	0.734 057	0.092 1992	72.982 6	1.441 17	2
9	0.922 076	0.102 698	76.953 5	1.473 48	3
10	1.787 79	0.126 755	84.787 9	1.097 98	4
11	1.893 69	0.137 475	85.840 4	1.272 16	5
12	2.009 39	0.146 938	86.715 5	1.296 3	6
13	2.171 71	0.156 73	87.634	1.875 86	7
14	2.042 44	0.166 625	87.662 3	1.901 95	8
15	2.224 46	0.177 123	88.560 9	2.205 9	9

16	2.483 68	0.184 85	89.415 3	2.515 06	10
17	2.408 52	0.192 616	89.482 4	3.077 36	11
18	2.299 47	0.201 279	89.515 3	3.169 74	12
19	2.575 03	0.211 646	90.359 9	2.677 75	13
20	2.493 3	0.218 505	90.385 2	2.845 23	14
21	2.814 91	0.223 275	91.015	3.556 55	15
22	2.701 76	0.232 994	91.059 4	4.003 06	16
23	2.618 39	0.240 51	91.092 5	4.245 6	17
24	2.624 38	0.247 979	91.261 2	4.691 49	18
25	3.102 43	0.254 33	92.037 5	5.335 98	19
26	3.138 36	0.225 618	92.070 9	6.635 39	20
27	2.836 33	0.261 977	91.793 2	7.309 78	21
28	3.247 33	0.268 459	92.416 2	8.117 98	22
29	3.109 73	0.275 003	92.361 4	8.768 22	23
30	3.057 47	0.280 714	92.390 9	9.399 71	24
31	2.964 44	0.290 582	92.436 7	9.898 56	25
32	2.885 31	0.297 096	92.448 9	10.061 4	26
33	2.860 88	0.302 277	92.500 3	10.887	27
34	3.210 96	0.308 675	92.972 1	10.927	28
35	3.132 61	0.314 507	92.971 6	11.491 4	29
36	3.106 17	0.318 594	92.994 3	12.212 1	30
37	3.126 77	0.317 186	92.970 8	13.280 1	31
38	3.091 81	0.321 311	92.985 8	13.829 4	32
39	3.040 2	0.327 929	93.027 5	15.015 3	33
40	3.999 28	0.333 338	93.057 9	16.252 7	34
41	3.535 9	0.339 403	93.622 5	17.852 4	35
42	3.396 38	0.346 912	93.595	17.986 5	36
43	3.093 05	0.349 875	93.358 3	20.025 2	37
44	3.303 12	0.356 703	93.622 5	20.665	38
45	2.809 52	0.362 238	93.236 4	21.517	39
46	2.786 8	0.366 807	93.270 7	21.876 3	40
47	2.748 54	0.370 688	93.278 8	21.056 1	41
48	2.725 86	0.375 712	93.315 5	21.866 2	42
49	2.680 44	0.379 945	93.319 8	24.443 3	43
50	2.625 45	0.389 108	93.366 1	25.378 4	44
51	2.595 5	0.393 784	93.391 2	25.559 8	45
52	2.574 54	0.396 793	93.404 8	25.569	46
53	2.561 7	0.400 767	93.437 8	26.385 9	47
54	2.535 08	0.406 156	93.473 5	26.137 8	48
55	2.472 81	0.414 5	93.513 5	24.705 3	49
56	2.443 13	0.418 696	93.528 7	26.409 3	50

Table 1: results for SES equations of curves node numbers 7-56

4.2 Graphical Plots for Results Obtained.

This analysis is performed in gnuplot in Linux.

1. Node Number 7

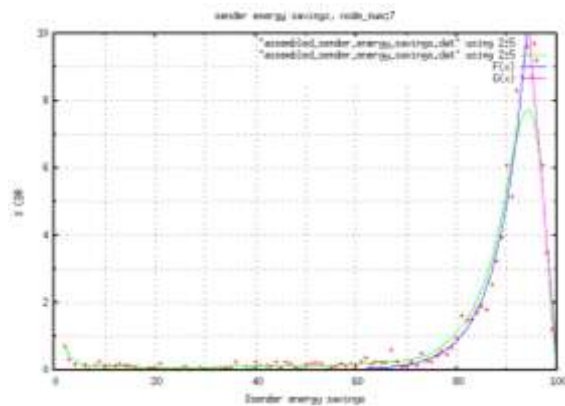


Figure 1: % cbr for SES node_number 7

2. Node Number 8

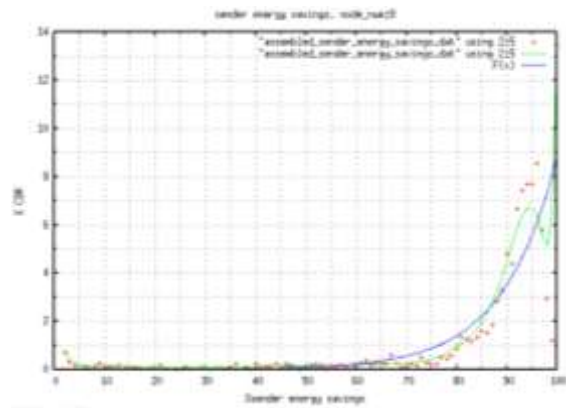


Figure 2: % cbr for SES node_number 8

3. Node Number 9

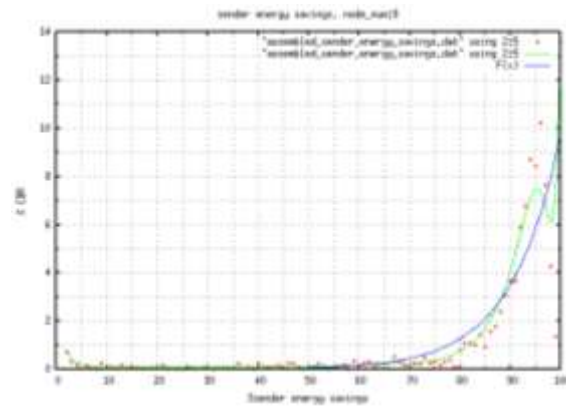


Figure 3: % cbr for SES node_number 9

4. Node Number 10

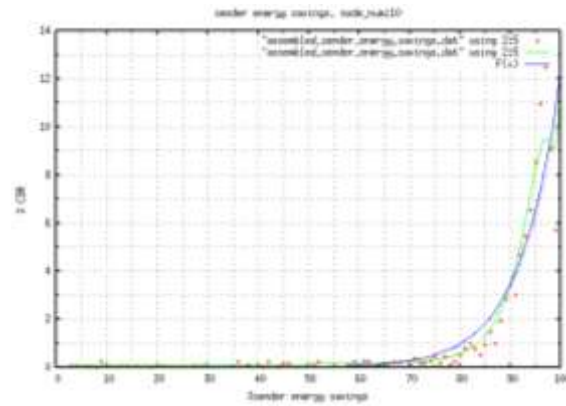


Figure 4: % cbr for SES node_number 10

5. Node Number 11

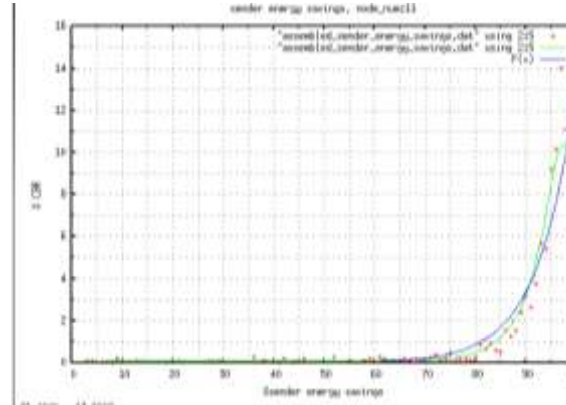


Figure 5: % cbr for SES node_number 11

6. Node Number 12

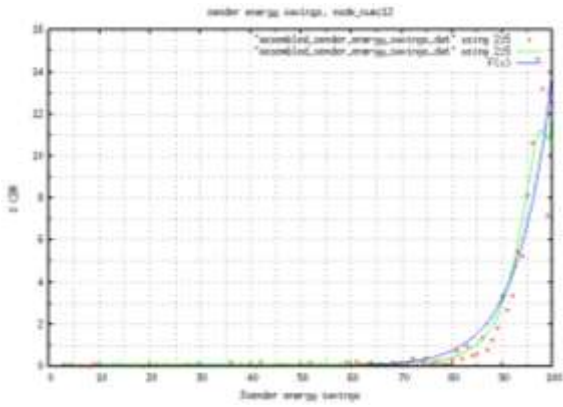


Figure 6: % cbr for SES node_number 12
7. Node Number 13

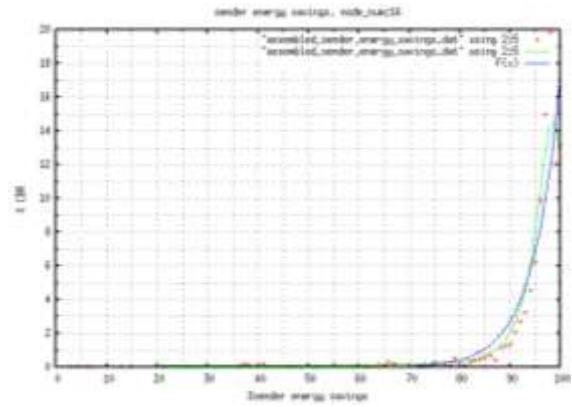


Figure 10: % cbr for SES node_number 16
11. Node Number 17

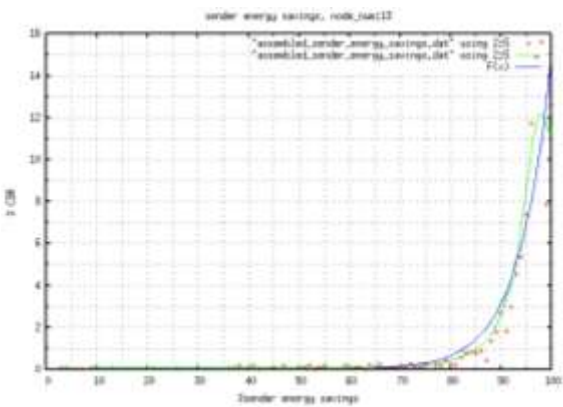


Figure 7: % cbr for SES node_number 13
8. Node Number 14

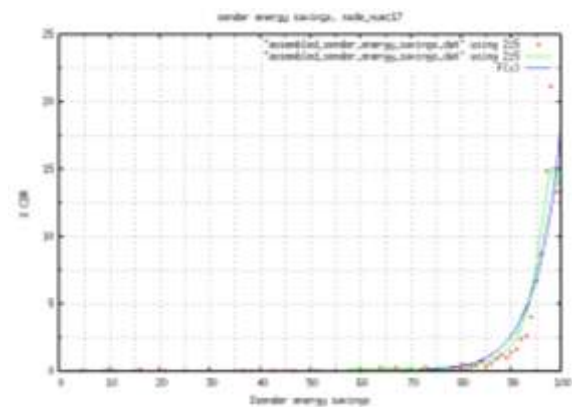


Figure 11: % cbr for SES node_number 17
12. Node Number 18

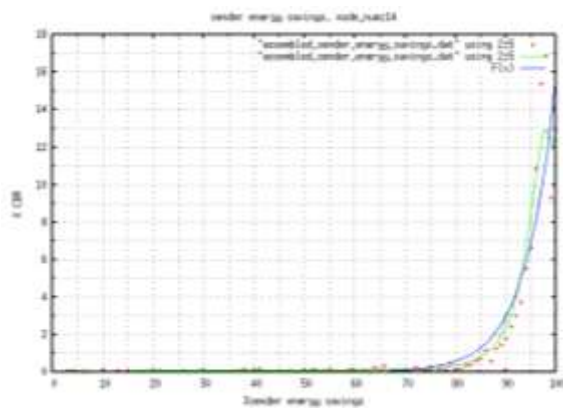


Figure 8: % cbr for SES node_number 14
9. Node Number 15

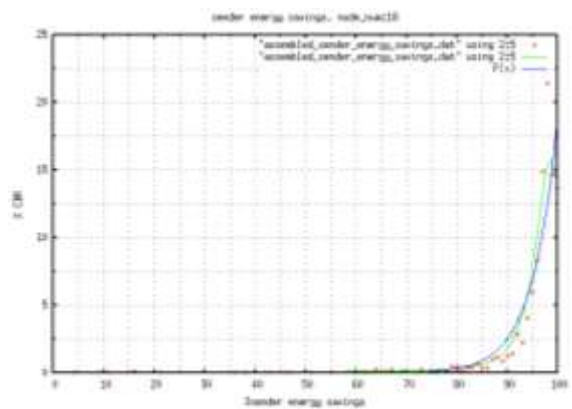


Figure 12: % cbr for SES node_number 18
13. Node Number 19

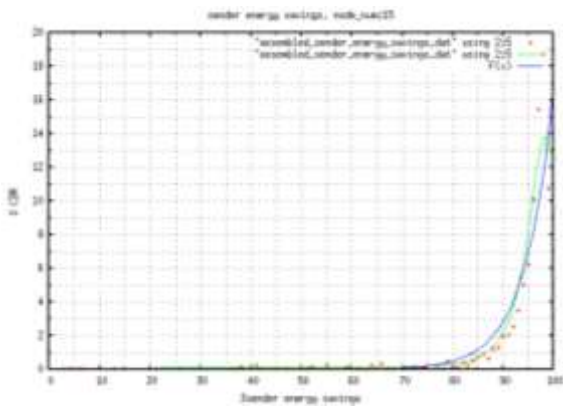


Figure 9: % cbr for SES node_number 15
10. Node Number 16

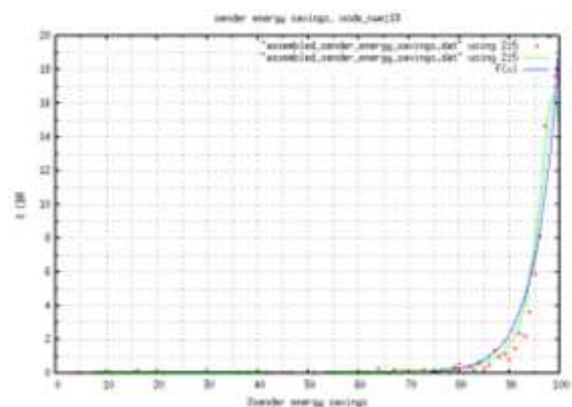


Figure 13: % cbr for SES node_number 19
14. Node Number 20

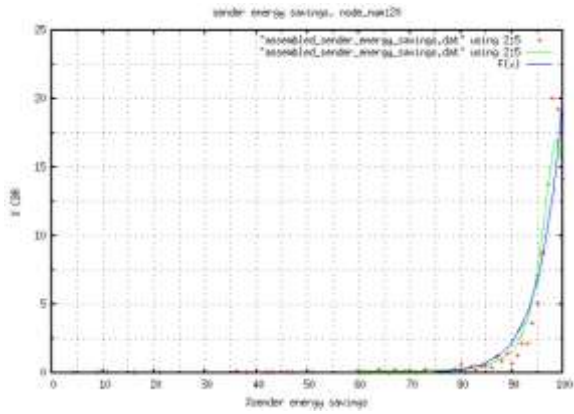


Figure 14: % cbr for SES node_number 20

15. Node Number 21

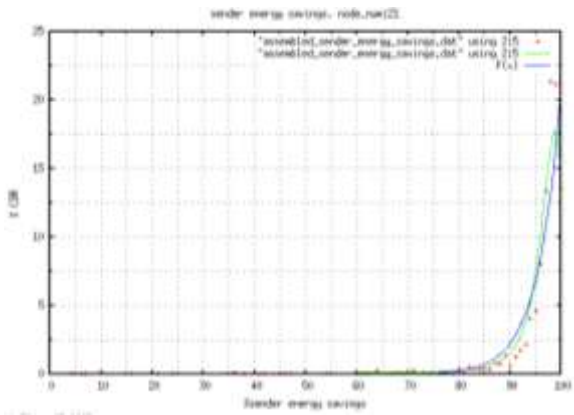


Figure 15: % cbr for SES node_number 21

16. Node Number 22

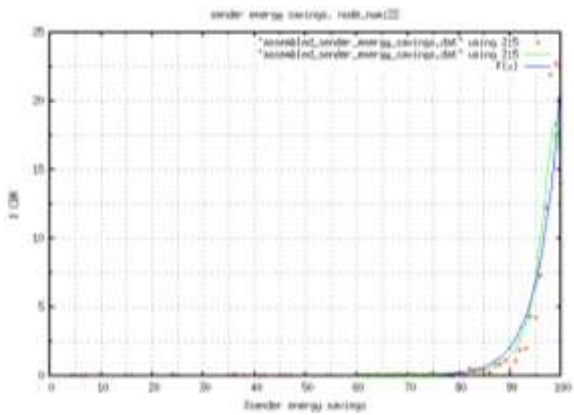


Figure 16: % cbr for SES node_number 22

17. Node Number 23

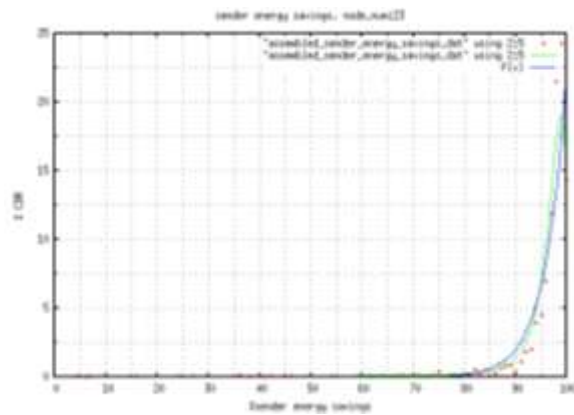


Figure 17: % cbr for SES node_number 23

18. Node Number 24

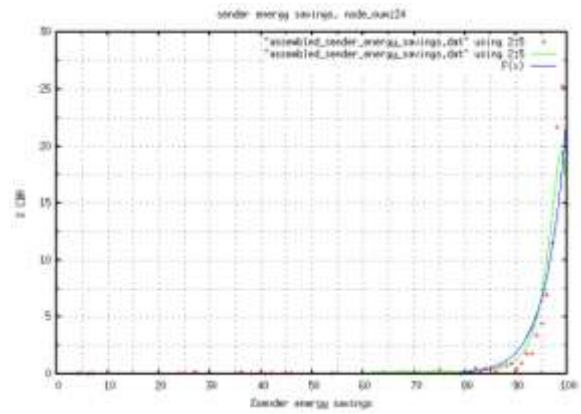


Figure 18: % cbr for SES node_number 24

19. Node Number 25

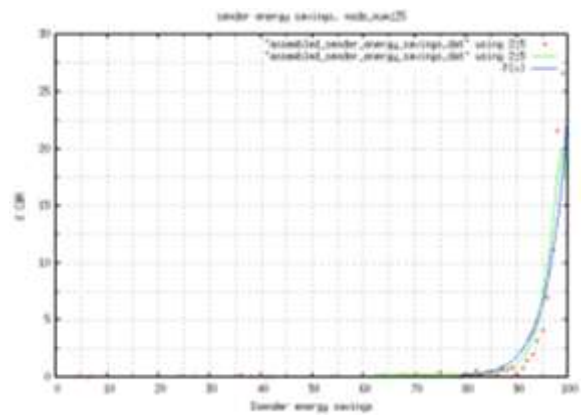


Figure 19: % cbr for SES node_number 25

20. Node Number 26

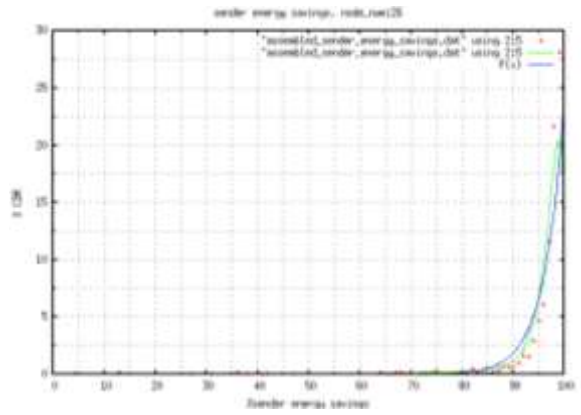


Figure 20: % cbr for SES node_number 26

21. Node Number 27

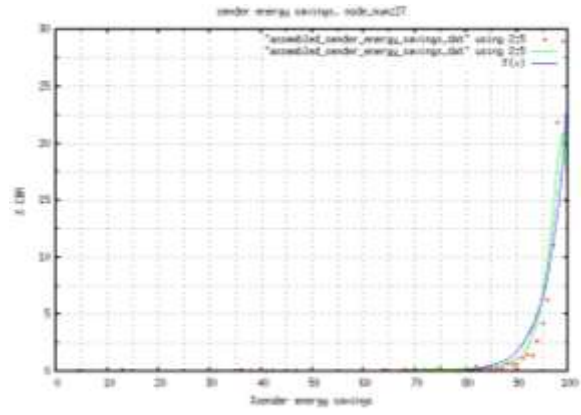


Figure 21: % cbr for SES node_number 27

22. Node Number 28

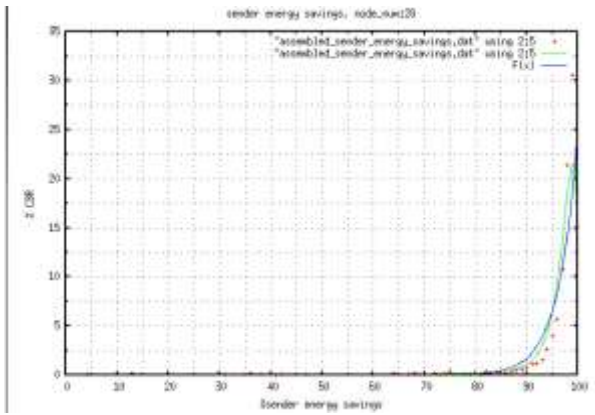


Figure 22: % cbr for SES node_number 28
 23. Node Number 29

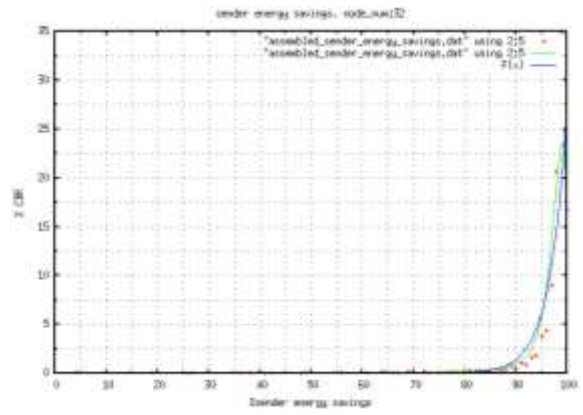


Figure 26: % cbr for SES node_number 32
 27. Node Number 33

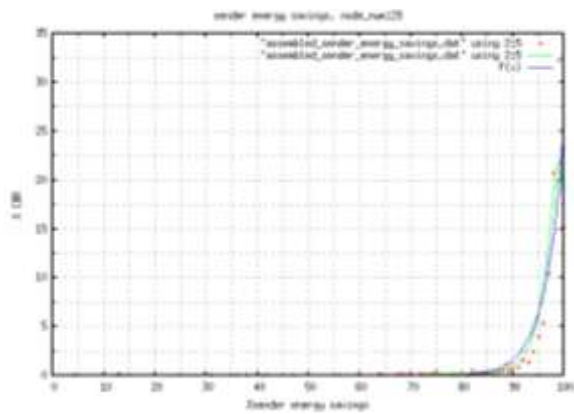


Figure 23: % cbr for SES node_number 29
 24. Node Number 30

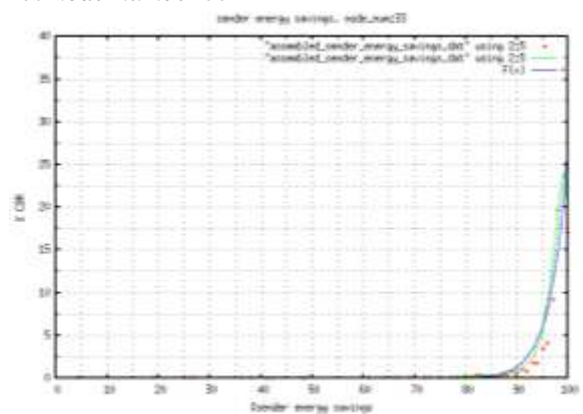


Figure 27: % cbr for SES node_number 33
 28. Node Number 34

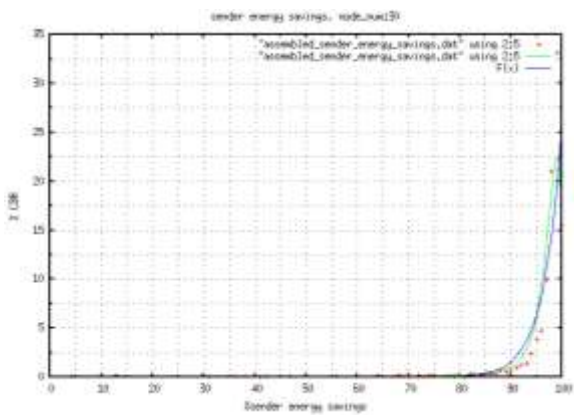


Figure 24: % cbr for SES node_number 30
 25. Node Number 31

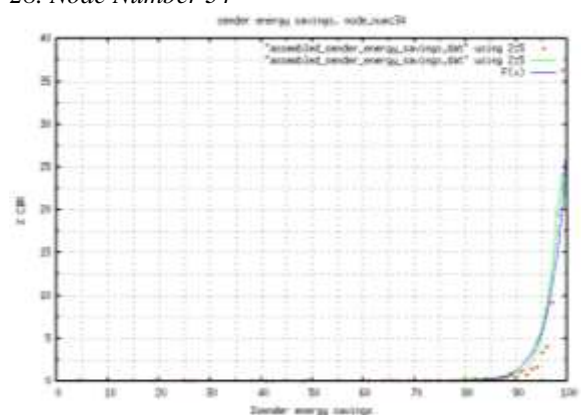


Figure 28: % cbr for SES node_number 34
 29. Node Number 35

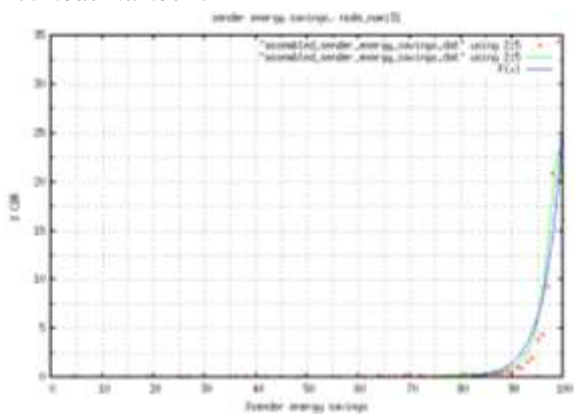


Figure 25: % cbr for SES node_number 31
 26. Node Number 32

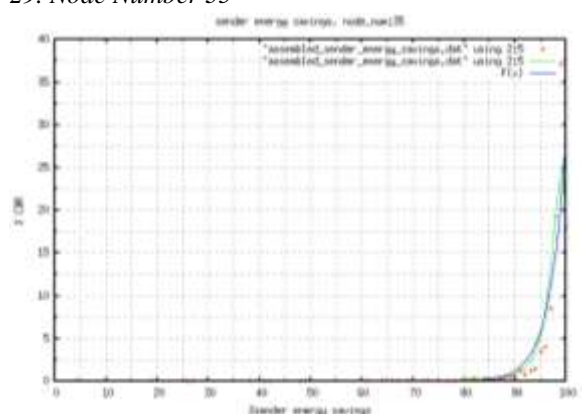


Figure 29: % cbr for SES node_number 35
 30. Node Number 36

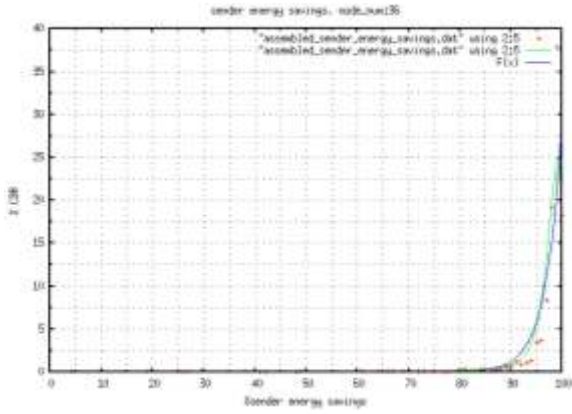


Figure 30: % cbr for SES node_number 36
31. Node Number 37

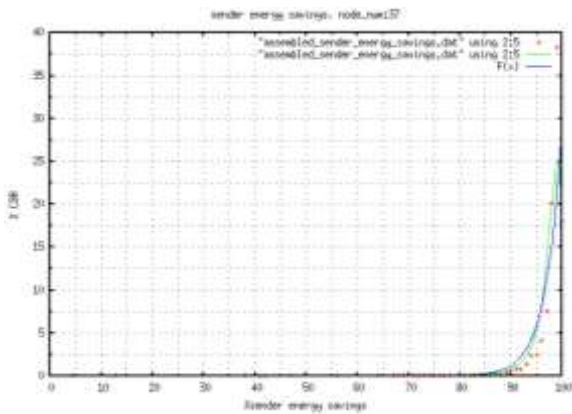


Figure 31: % cbr for SES node_number 37
32. Node Number 38

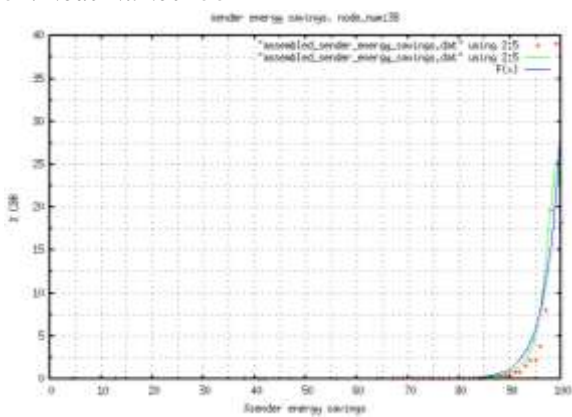


Figure 32: % cbr for SES node_number 38
33. Node Number 39

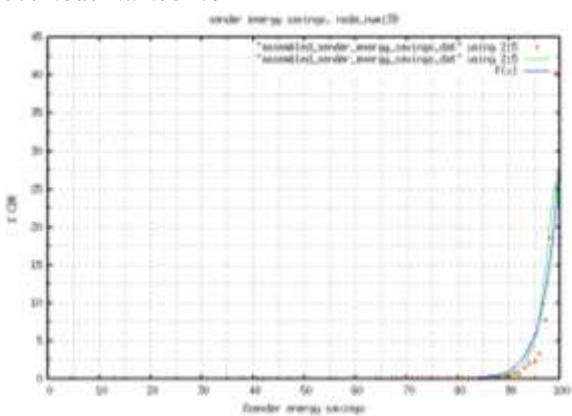


Figure 33: % cbr for SES node_number 39
34. Node Number 40

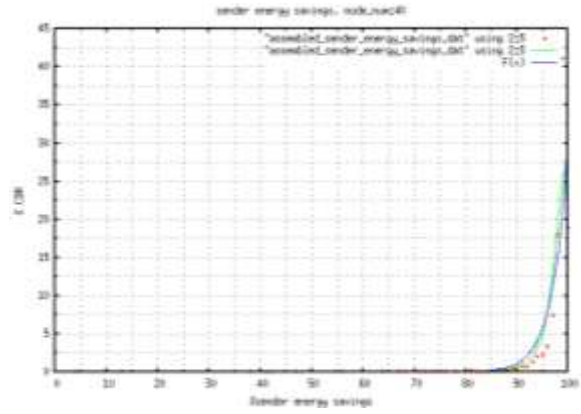


Figure 34: % cbr for SES node_number 40
35. Node Number 41

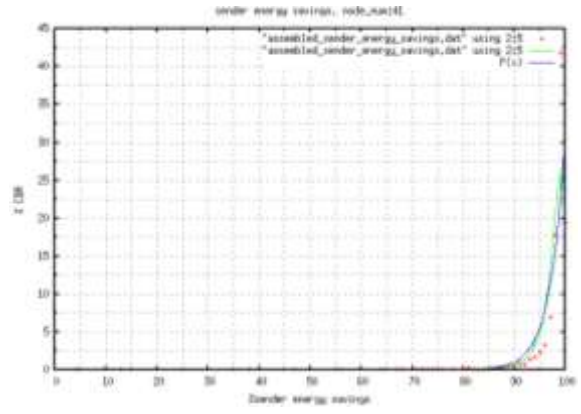


Figure 35: % cbr for SES node_number 41
36. Node Number 42

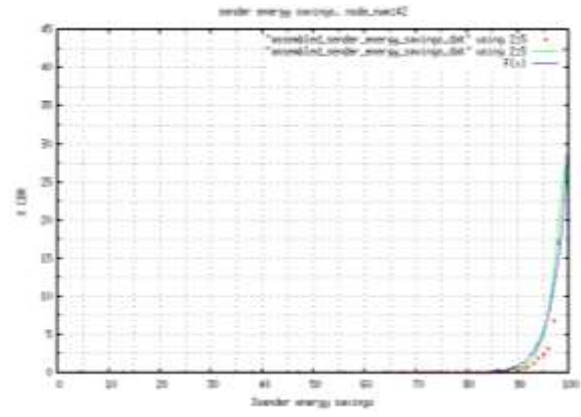


Figure 36: % cbr for SES node_number 42
37. Node Number 43

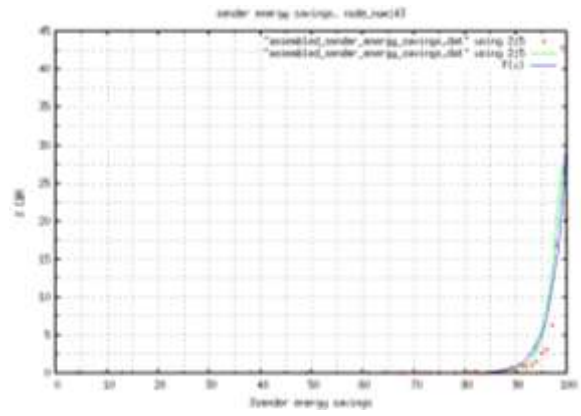


Figure 37: % cbr for SES node_number 43
38. Node Number 44

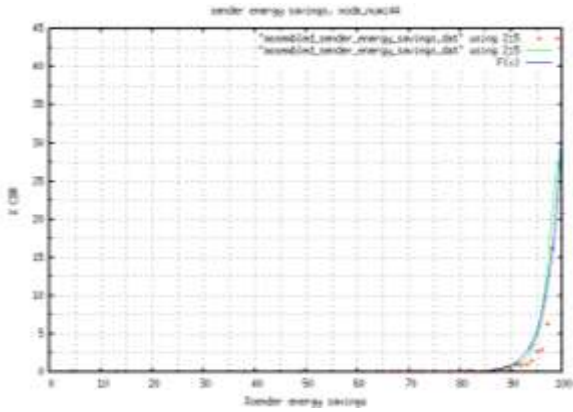


Figure 38: % cbr for SES node_number 44
 39. Node Number 45

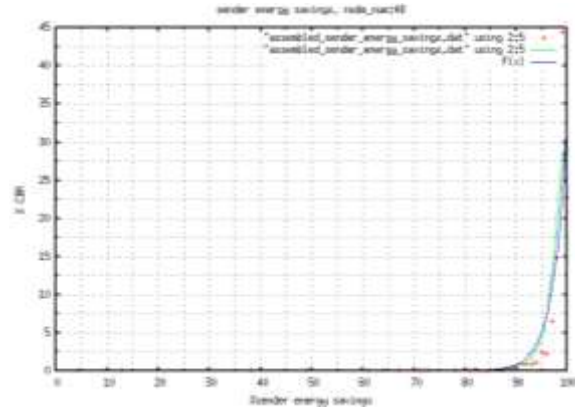


Figure 42: % cbr for SES node_number 48
 43. Node Number 49

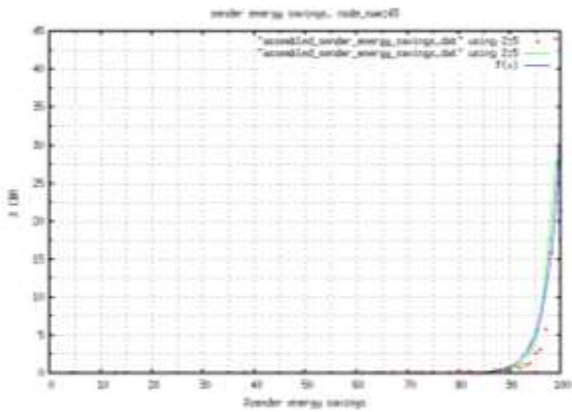


Figure 39: % cbr for SES node_number 45
 40. Node Number 46

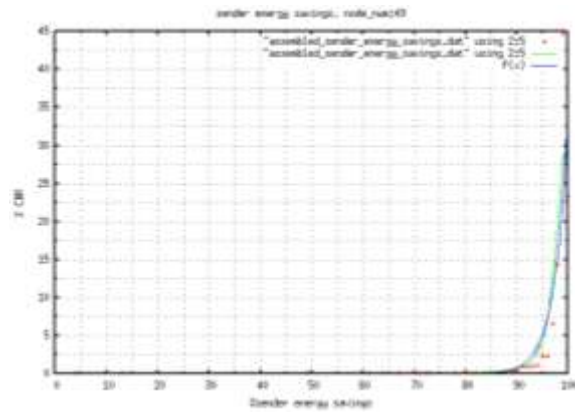


Figure 43: % cbr for SES node_number 49
 44. Node Number 50

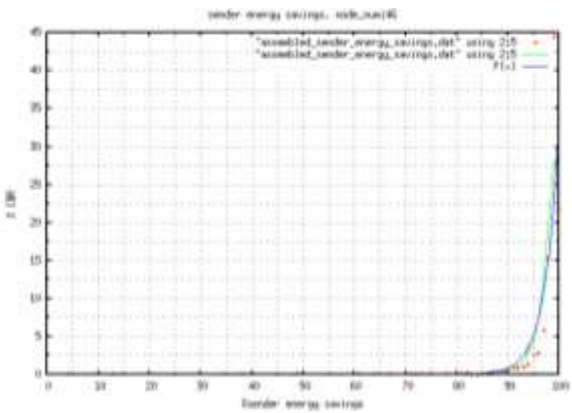


Figure 40: % cbr for SES node_number 46
 41. Node Number 47

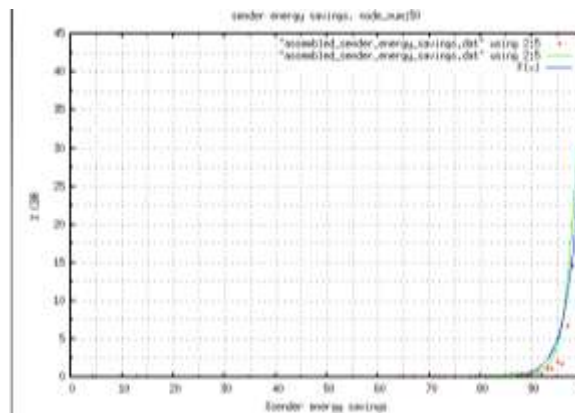


Figure 44: % cbr for SES node_number 50
 45. Node Number 51

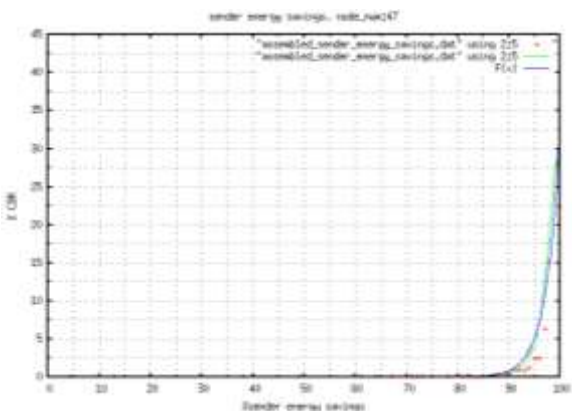


Figure 41: % cbr for SES node_number 47
 42. Node Number 48

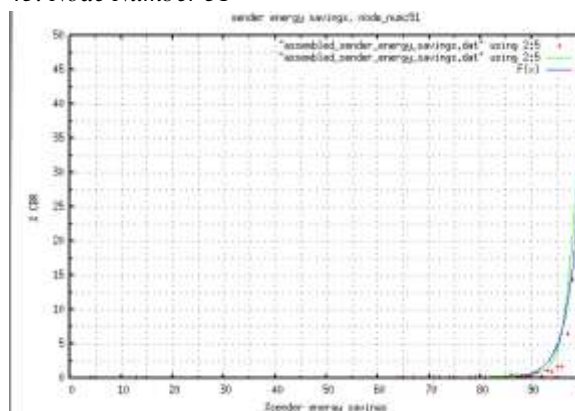


Figure 45: % cbr for SES node_number 51
 46. Node Number 52

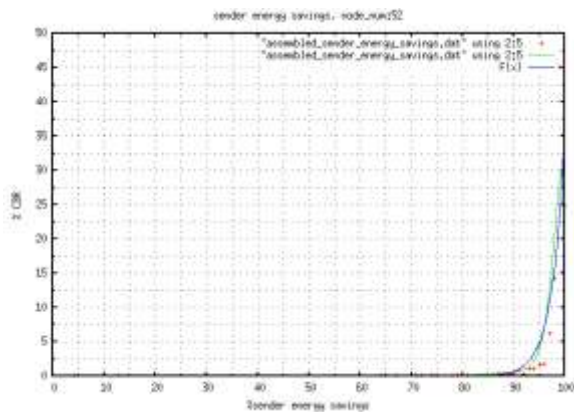


Figure 46: % cbr for SES node_number 52
 47. Node Number 53

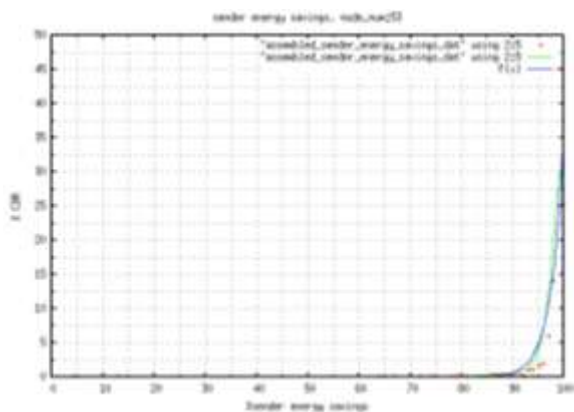


Figure 47: % cbr for SES node_number 53
 48. Node Number 54

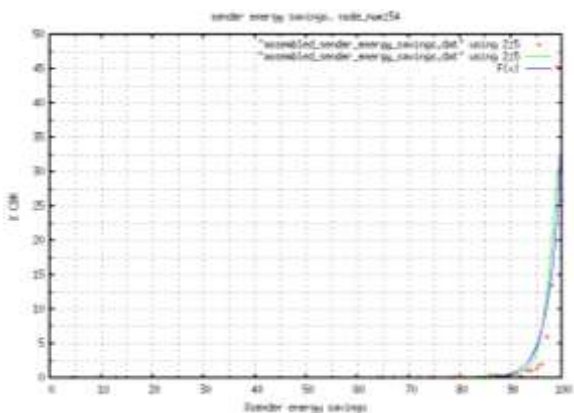


Figure 48: % cbr for SES node_number 54
 49. Node Number 55

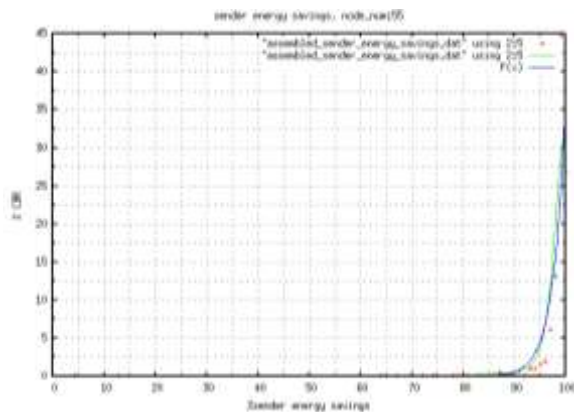


Figure 49: % cbr for SES node_number 55
 50. Node Number 56

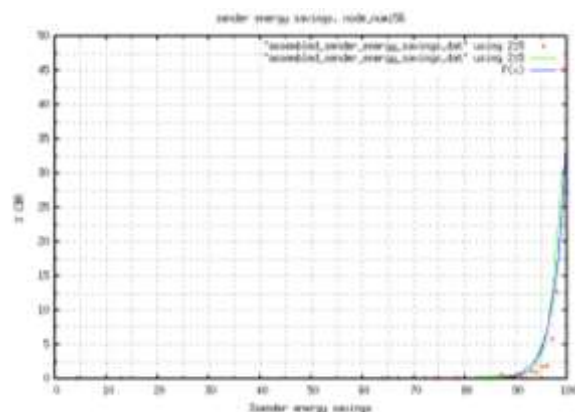


Figure 50: % cbr for SES node_number 56

5. Conclusion.

This piece of research was aimed at and has developed a new model of expected trend of sender energy savings in a MANET topography of 300 x 300 m². The model obtained will help to study MANETs for MAUC environment from a software engineering perspective. This model, though empirical based, has put forward novel results which would necessitate quite huge investments if experimented in real environment implementations. Besides, many components over which these experiments would be built are still subject to further research, e.g. lightweight algorithms for location-aware transmission in a MAUC environment, development of land-based location support with appropriate algorithms and surrogate devices and lightweight MAUC OS supports.

The experiment was carried out in NS-s over Linux on VMware. The experiments were designed, implemented and executed over many months. Tremendous amount of data has been generated and abundant storage space has been required.

The further works identified may include: trend analysis of parameters of equation for the model, formulating method of predictability for metric SES and its trend and reporting observations of certain critical values.

References

- [1] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Towards Dependable Pervasive Systems-A Position and Vision Paper, CEET 2014
- [2] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Model of Energy Savings achievable with Location-aware Node-to-Node Transmission in UbiComp , CEET 2014
- [3] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Model of Energy Savings achievable with Location-aware Node-to-Node Transmission in UbiComp Using Location Refresh Intervals, CEET 2014
- [4] M. Kaleem GALAMALI, Assoc. Prof Nawaz

- MOHAMUDALLY, Model of Energy Savings achievable with Location-aware Transmission in UbiComp Using Relays, CEET 2014
- [5] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Mathematical modeling of need of exact number of relays to ensure seamless mobility in mobile computing, CEET 2014
- [6] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Modelling of need for multiple relays for ensuring seamless mobility, CEET 2014
- [7] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Investigation of prominence of placements of relays in a ubicomp topography,
- [8] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Model of energy savings achievable with location-aware transmission in ubicomp using optimised number of relays.
- [9] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Investigation of Prominence of Placements of Optimised Number of Relays in a Ubicomp Topography using Location-Aware Transmission, CEET 2015.
- [10] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Extending Node Battery Availability in Ubicomp with Location-Aware Transmission, CEET 2015.
- [11] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Extending Node Battery Availability in Ubicomp with Location-Aware Transmission using Location Refresh Intervals, CEET 2015.
- [12] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Extending Node Battery Availability in Ubicomp with Location-Aware Transmission using Uniformly Placed Relays, CEET 2015.
- [13] M. Kaleem GALAMALI, Assoc. Prof Nawaz MOHAMUDALLY, Extending Node Battery Availability in Ubicomp with Location-Aware Transmission Using Optimally Placed Relays, CEET 2015.
- [14] Markus Bylund and Zary Segall, Towards seamless mobility with personal servers, 2004.
- [15] Masugi Inoue, Mikio Hasegawa, Nobuo Ryoki and Hiroyuki Morikawa, Context-Based Seamless Network and Application Control, 2004
- [16] Xiang Song, Umakishore Ramachandran, MobiGo: A Middleware for Seamless Mobility, College of Computing Georgia Institute of Technology, Atlanta, GA, USA, August 2007
- [17] Budzisz, Ferrús, R., Brunstrom A., Grinnemo, K, Fracchia, R., Galante, G., and Casadevall, F. Towards transport-layer mobility: Evolution of SCTP multihoming, March 2008
- [18] Paul Dourish & Genevieve Bell, Divining a digital future, 2011.
- [19] Xiang Song, Seamless Mobility In Ubiquitous Computing Environments, PhD Thesis, Georgia Institute of Technology, August 2008
- [20] Kevin O Mahony, Jian Liang, Kieran Delaney, User-Centric Personalization and Autonomous Reconfiguration Across Ubiquitous Computing Environments, NIMBUS Centre Cork Institute of Technology, Cork, Ireland, UBICOMM 2012
- [21] Pablo Vidales, Seamless mobility in 4G systems, *Technical Report, University of Cambridge*, Computer Laboratory, Number 656, November 2005
- [22] João Pedro Sousa and David Garlan, Aura: An Architectural Framework for User Mobility in Ubiquitous Computing Environments, School of Computer Science, Carnegie Mellon University, USA, August 2002
- [23] Dennis Lupiana, Ciaran O'Driscoll, Fredrick Mtenzi, Defining Smart Space in the Context of Ubiquitous Computing, Dublin Institute of Technology, Ireland, Special Issue on ICIT 2009 Conference - Web and Agent Systems, 2009
- [24] N.S.V.Shet1, Prof.K.Chandrasekaran2 and Prof. K.C.Shet3, *WAP Based Seamless Roaming In Urban Environment with Wise Handoff Technique*, International Journal of UbiComp (IJU), Vol.1, No.4, October 2010
- [25] Yipeng Yu Dan He Weidong Hua Shijian Li Yu Qi Yueing Wang Gang Pan, FlyingBuddy2: A Brain-controlledAssistant for the Handicapped, Zhejiang University, *UbiComp '12*, September 5-8, 2012.
- [26] Jing Su, James Scott, Pan Hui, Jon Crowcroft, Eyal de Lara Christophe Diot, Ashvin Goel, Meng How Lim, and Eben Upton, *Haggle: Seamless Networking for Mobile Applications*, 2007
- [27] Rui Han, Moustafa M. Ghanem, Li Guo, Yike Guo*, Michelle Osmond, Enabling cost-aware and adaptive elasticity of multi-tier cloud applications, *Future Generation Computer Systems*, 2012
- [28] Byrav Ramamurthy, K. K. Ramakrishnan , Rakesh K. Sinha, Cost and Reliability Considerations in Designing the Next-Generation IP over WDM Backbone Networks, 2012.
- [29] Bhavish Aggarwal, Aditya Akella, Ashok Anand, Athula Balachandran, Pushkar Chitnis, Chitra Muthukrishnan, Ram Ramjee and George Varghese, EndRE: An End-System Redundancy Elimination Service for Enterprises, NSDI 2010, San Jose, CA
- [30] Ashok Anand, Vyas Sekar and Aditya Akella, SmartRE: An Architecture for Coordinated Network-wide Redundancy Elimination, SIGCOMM 2009, Barcelona, Spain
- [31] John Breeden II, "Smart-phone battery life could double – without better batteries", Nov 14, 2012
- [32] Andy Boxall, "When will your phone battery last as long as your kindle", December 5, 2012.
- [33] Imielinski, T. and Navas, J.C. (1999). GPS-based geographic addressing, routing, and resource discovery. *Comms. ACM*, Vol. 42, No. 4, pp. 86-92.
- [34] Hightower, J. and Borriello, G. (2001). Location Systems for Ubiquitous Computing. *IEEE Computer*, Vol. 34, No. 8, August, pp. 57-66.
- [35] Harter, A., Hopper, A., Steggle, P., Ward, A. and Webster, P. (2002). The Anatomy of a Context-Aware Application. *Wireless Networks*, Vol. 8, No. 2-3, Mar-May, pp. 187-197.
- [36] Hightower, J., Brumitt, B. and Borriello, G. (2002). The Location Stack: A Layered Model for Location in Ubiquitous Computing. *Proceedings of the 4th IEEE Workshop on Mobile Computing Systems & Applications (WMCSA 2002)*, Callicoon, NY, USA, June, pp. 22-28.
- [37] Graumann, D., Lara, W., Hightower, J. and Borriello, G. (2003). Real-world implementation of the Location Stack: The Universal Location Framework. *Proceedings of the 5th IEEE Workshop on Mobile Computing Systems & Applications (WMCSA 2003)*, Monterey, CA, USA, October, pp. 122-128.
- [38] Ko, Y., & Vaidya, N. H. (2000). Location-aided routing (LAR) in mobile ad hoc networks. *Wireless Networks*, 6(4), 307-321.
- [39] Liao, W.-H., Tseng, Y.-C., & Sheu, J.-P. (2001). GRID: a fully location-aware routing protocol for mobile ad hoc networks. *Telecommunication Systems*, 18(1), 37-60.
- [40] Kuhn, F., Wattenhofer, R., Zhang, Y., & Zollinger, A. (2003). Geometric ad-hoc routing: of theory and practice. In *Proceedings of the ACM (PODC'03)* (pp. 63-72).
- [41] Jiang, X., & Camp, T. (2002). Review of geocasting protocols for a mobile ad hoc network. In *Proceedings of the Grace Hopper Celebration (GHC)*.
- [42] Ko, Y. & Vaidya, N. H. (1999). Geocasting in mobile ad hoc networks: location-based multicast algorithms. In *Proceedings of the IEEE (WMCSA '99)* (pp. 101).
- [43] Mauve, M., Fuler, H., Widmer, J., & Lang, T. (2003). *Position-based multicast routing for mobile ad-hoc networks* (Technical Report TR-03-004). Department of Computer Science, University of Mannheim.
- [44] Xu, Y., Heidemann, J., & Estrin, D. (2001). Geography-informed energy conservation for adhoc routing. In *Proceedings of the ACM/IEEE (MOBICOM '01)* (pp. 70-84).
- [45] Hu, Y.-C., Perrig, A., & Johnson, D. (2003). Packet leashes: a defense against wormhole attacks in wireless ad hoc networks. In *Proceedings of the INFOCOM '03* (pp. 1976-1986).
- [46] Patwari, N., Hero III, A. O., Perkins, M., Correal, N. S., &

- O'Dea, R. J. (2003). Relative location estimation in wireless sensor networks. *IEEE Transactions on Signal Processing*, 51(8), 2137-2148.
- [47] Baldauf, M., Dustdar, S., & Rosenberg, F. (2007). A Survey on Context Aware Systems. *International Journal of Ad Hoc and Ubiquitous Computing*, Inderscience Publishers. forthcoming. Pre-print from: <http://www.vitalab.tuwien.ac.at/~florian/papers/ijahuc2007.pdf>
- [48] Hong, D., Chiu, D.K.W., & Shen, V.Y. (2005). Requirements elicitation for the design of context-aware applications in a ubiquitous environment. In *Proceedings of ICEC'05* (pp. 590-596).

About Author (s):

Associate Professor Nawaz Mohamudally works at University of Technology, Mauritius (UTM) and has undertaken supervision of MPhil/PhD Students for many years.



M. Kaleem Galamali is a part-time student (achieved M Phil Transfer on 28.10.2014, currently PhD student) at UTM under supervision of A.P. Nawaz Mohamudally.